

VT-7000S

2x7" 1920x1200 Full HD
Easy dual screen monitoring with real-time accurate scope viewing




2x7" HDMI & 3G-SDI Rack Mount Monitor

Rack mount monitor for broadcast & live streaming.
Application for video wall & broadcast trucks.



Precise Scope Views

The video production manager can analyze the quality of image by calling up different scopes, for example, false color, level meter, histogram. And both video sources are displayed independently.

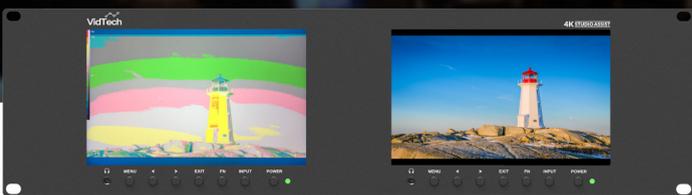

Auxiliary Functions

Provides plenty of auxiliary functions for taking photos and making movies, such as peaking, exposure and time code.



Each display is an independent device that receives the video source and works with different functions separately, for example, different Level Meter and 3D-LUT.

3D-LUT

3D-LUT is a table for quickly looking up and output specific color data. By loading different 3D-LUT tables, it can quickly recombine color tone to form different color styles.

Built-in 3D-LUT, featuring 17 default logs and 6 user logs.



Full HD Independent Dual Display

The 7" 16:10 LCD panel with 1920x1200 full HD resolution, 2000:1 high contrast, 160° viewing angles, 400 cd/m² brightness, which offers outstanding viewing experience.



SDI & HDMI In/Out

Monitoring up to 1080p 60Hz SDI and 2160p 60Hz HDMI videos. Just add signal cables to expand more diverse display solutions through loop output interfaces. Help creating a camera video wall.



Easy Remote Control

All monitors can be perfectly adjusted by a dedicated computer under the control of software. So you can focus on other operation on the workbench at the same time.



Monitor connects a working computer through LAN and recognize each other after adjusting the IP address. Then link start immediately.



Picture
Display items can be controlled include: Brightness, Contrast, Saturation, Tint, Sharpness, Backlight, Color Temp.

Marker
Image markers can be controlled include: Center Marker, Marker Color, Aspect Marker, Safety Marker, Aspect Mat and Thickness.

Function
The built-in function can be controlled include: Scan Mode, Overscan, Freeze, Aspect, HV Delay, Check Field, Timecode, Color Bar, Vector, Peaking, Exposure...




Source
Video sources can be controlled include: HDMI and SDI.

Audio
Audio items can be controlled include: Volume, Level Meter, Audio Vector and Audio Ch.

Tally/UMD
Tally function can be controlled under Tally/UMD mode. The UMD function is not available for this device.

Delicate Milled Structure

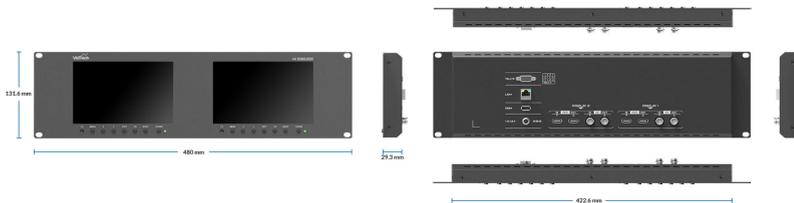

SPECIFICATIONS

DISPLAY	Panel	7.02" TFT
	Physical Resolution	1920x1200
	Aspect Ratio	16:10
	Brightness	400cd/m²
	Contrast	2000:1
INPUT	Viewing Angle	160°/160° (H/V)
	Supported Log Formats	ST 2084 300/1000/10000 / HLG
	LUT Support	3D-LUT (cube format)
OUTPUT	3G-SDI	2
	HDMI	2 (HDMI 2.0, supports up to 4K 60Hz)
FORMATS	LAN	1
	3G-SDI	2
AUDIO	HDMI	2 (HDMI 2.0, supports up to 4K 60Hz)
	SDI	1080p 60/50/30/25/24, 1080pSF 30/25/24, 1080i 60/50, 720p 60/50...
POWER	Ear Phone Slot	1
	Current	A
ENVIRONMENT	Input Voltage	DC 7-24V
	Power Consumption	5W
OTHER	Operating Temperature	-20°C~60°C
	Storage Temperature	-30°C~70°C
	Dimension (LWD)	480mmx131.6mmx29.3mm
	Weight	2885g

ACCESSORIES



3RU Rack Mount

Suitable for 19 inch width cabinet installation with 3RU mounting height and slim metal design, occupying only a small part of volume. Its flat front panel is designed to bring sufficient viewing angle.



Broadcast Truck

Post Production

Fly Away Kits